10-06-00

PATENT APPLICATION

ATTORNEY DOCKET NO. 10006131-1

HEWLETT-PACKARD COMPANY Intellectual Property Administration P. O. Box 272400 Fort Collins, Colorado 80527-2400

IN THE U.S. PATENT AND TRADEMARK OFFICE Patent Application Transmittal Letter

COMMISSIONER FOR PATENTS Washington, D.C. 20231

Sir

Enclosed are:

15

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (X) Utility () Design

(X) original patent application,

() continuation-in-part application

(X) unsigned or partially signed

() Associate Power of Attorney

\$

\$

\$

\$

INVENTOR(S): Daniel R. Pearson, David A. Kumpf and Glenn G. Carcido

0

TITLE: ADAPTIVE SCAN DRIVER AND SCAN PERIPHERAL

(X) The Declaration and Power of Attorney. () signed

(X) 4 sheets of drawings (one set)

ANY MULTIPLE

DEPENDENT CLAIMS

) Form	n PTO-1449	()	Information Discl	osure Statement	and Form	PTO-1449
) Prior	ity document(s)	()(Other)		(fe	ee \$)
	CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY					
	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5 TOT <i>t</i>	
	TOTAL CLAIMS	13 — 20	0	X \$18	\$	0
	INDEPENDENT CLAIMS	4 — 3	1	X \$80	\$	80

Charge \$ 790 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17,1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

TOTAL CHARGES TO DEPOSIT ACCOUNT

BASIC FEE: Design (\$320.00); Utility (\$710.00

"Express Mail" label no. EL40949500405
Date of Deposit 10/5/00
I hereby certify that this is being deposited with the United States Postal Service "Express Mail Pool Office to Addressee" service under 37 CFR 1.10 or the date indicated above and is addressed to Commissioner for Patents, Washington, D.C 20231.

Respectfully submitted,

\$270

TOTAL FILING FEE

OTHER FEES

Daniel R. Pearson, David A. Kumpf and

0

710

790

790

By

Steven P. Fallon

Attorney/Agent for Applicant(s)

Reg. No. **35,132**Date: **10/5/00**

Telephone No.: (312) 993-0080

Typed Name. Alfredo Zhagui

2

3

4

5

6

7

8 9

10 11

12

13

14 15

16

17

18

19 20 I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: BOX PATENT APPLICATION. ASSISTANT COMMISSIONER FOR PATENTS, Washington, D.C. 20231, on this data

October 5, 2000

Date

Express Mail No. EL409495004IUS

Daniel R. Pearson, David A. Kumpf and Glenn G. Carcido

ADAPTIVE SCAN DRIVER AND SCAN PERIPHERAL

FIELD OF THE INVENTION

The field of the invention is scan peripherals. The invention is directed toward a driver for controlling scan jobs directed to a scan peripheral. A driver of the invention may be embodied in a dedicated peripheral server.

BACKGROUND OF THE INVENTION

A scan peripheral is a scanner or multi-function device including a scanning function. Scan peripherals may be accessed through a server so that multiple users may use the same scan peripheral over a network, for example. A single machine may also directly access or share access to a scan peripheral or multiple peripherals through a server. A single machine might also contain a driver to interface to a scan peripheral directly.

A scan peripheral server is typically realized in software that is installed in some type of general purpose computer system. Hardware might also be used, but would be more difficult to realize. Server software may be run in the general purpose computer of a specialized physical device, such as a Hewlett-Packard JetDirect® external or internal server. JetDirect® devices can control multiple scan peripherals, including scanners and multi-function peripherals. Each scan peripheral requires a driver, which functions to control a scan job from a particular peripheral according to the capabilities and protocol for the particular

peripheral. A JetDirect® server or other server that interfaces to multiple scan peripherals typically includes multiple drivers to facilitate control of scan jobs from different scan peripherals.

A problem arises when a scan peripheral server having a set of drivers or a stand-alone driver encounters a scan peripheral unaccounted for by the existing driver(s). This may happen, for example, when scan peripherals are replaced with new scan peripherals or new scan peripherals are added. In such a case, a new scan peripheral will not work with the old server/driver and a user must take additional inconvenient steps to make the new scan peripheral work. Expense and frustration often result.

Thus, there is a need for an improved scan peripheral driver. It is an object of the invention to provide such a driver. A further object of the invention is to provide an improved scan peripheral server and improved scan peripheral.

SUMMARY OF THE INVENTION

A driver of the invention meets such a need by adapting to scan peripherals using information in a capability descriptor provided by a scan peripheral or a capability descriptor associated with a scan peripheral based on the model of the scan peripheral. A driver of the invention automatically determines a scan peripheral's capabilities using information from the capability descriptor, and uses the information to configure itself from a set of driver modules. A user interface and scan job are then run through options enabled by the appropriate set of driver modules as determined by the capability descriptor.

A preferred embodiment server of the invention embodies such an adaptive driver that queries a scan peripheral when it is first connected to the server. If an appropriate capability descriptor is obtained in response to the query, the capability descriptor is stored for use during a scan job. When a scan job using that peripheral is requested, user interface code extracts information from the capability descriptor to allow the user interface to dynamically change dependent

upon the peripheral's capabilities as indicated by the information from the capability descriptor. Capabilities indicated by a capability descriptor might include, for example, dots per inch choices, paper sizes, color/grayscale options, image formats, and whether or not a preview scan is supported. The appropriate capabilities become selectable through a user interface at a client computer. When a scan job is directed, scan driver software/firmware uses selected parameters passed by the client and the information from the stored capability descriptor to determine an appropriate command protocol and image encoding. A set of driver modules is then dynamically linked to create an appropriate driver for the scan job.

The invention also includes a scan peripheral or multi function peripheral capable of supplying a capability descriptor in response to a request. The preferred driver of the invention expects to receive a capability descriptor. However, in an aspect of the invention, the preferred driver or a preferred server including the driver may also address the case of scan peripherals or multi function peripherals that are not capable of providing a capability descriptor in response to a request. In this aspect of the invention, the preferred driver includes stored capability information corresponding to a set of known scan peripherals or multi function peripherals. When the driver fails to receive an appropriate capability descriptor in response to a request, the driver then selects from the stored capability information based upon the model of scan peripheral. Model information is typically provided by conventional scan peripherals on request.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram illustrating a preferred server of the invention connected to a network and multiple peripherals;

FIGs. 2a and 2b are a flowchart illustrating steps performed by a preferred driver program of the invention and

FIG. 3 is a block diagram for a preferred driver program of the invention usable in the server of FIG 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention, in its most preferred embodiment, includes a scan peripheral, i.e., a scanner or a multi-function scan peripheral, that provides a scan driver a capability descriptor that the driver can use to dynamically configure itself. However, a driver of the invention may also account for the case where a scan peripheral is unable to provide a capability descriptor by determining a model of the scan peripheral and selecting an appropriate predetermined capability description for the scan peripheral. The invention is particularly beneficial to dedicated servers, such as Hewlett-Packard JetDirect® servers, that operate with many different types of peripherals. Such servers operate under constraints that make it harder to deploy and install new software to address a peripheral model unaccounted for by the software originally resident in the server. Artisans will appreciate that the adaptive driver part of the invention may also be realized outside of a dedicated server as software or in any general purpose computer having a peripheral interface.

FIG. 1 illustrates the preferred case where a preferred server 10 connects a peripheral 12 to a network 13 accessible by one or more client computers 14. The server 10 also provides an interface to one or more additional peripherals 16a, 16b. The server 10 includes a driver 18. The driver 18 might alternately be resident in another device, such as a computer or server directly interfaced to one or more peripherals.

The peripheral 12 and peripherals 16a, 16b are preferably constructed in accordance with the invention to provide a capability descriptor in response to a query by the driver 18. A capability descriptor provides information about the scan capabilities offered by the peripheral and is preferably realized as a data string. The capability descriptor may include, for example, one or more of

2

3

4

5

6

7

8

9

10

11 12

13

14

15

16

17

18

19

20

21

22

23

24

2526

27

28

29

dots per inch choices, paper sizes, color/grayscale options, image formats, and whether or not a preview scan is supported.

Referring now to FIG. 2a, the manner in which the preferred driver 18 of the invention conducts a scan job is shown. A scan job is initiated 20 upon a request from a client computer. Memory is checked 22 to see if a capability descriptor has been previously stored for the scan peripheral to which the scan job is directed. If there is no previously stored capability descriptor, a query is made to obtain 24 a capability descriptor from the peripheral to which the scan job is directed. It is then determined 26 whether an appropriate capability descriptor has been received. A received capability descriptor is stored 28 in memory for future use with scan jobs associated with the peripheral from which it was received. If there is no received or previously stored capability descriptor, the response to the query from the scan peripheral is checked 30 for model information. This will be the case where the scan peripheral has not been made to provide capability Model information is typically provided by conventional scan peripherals on request. If necessary, a separate request for the model information is conducted. Using the model information, memory is referenced 32 to select a pre-stored capability descriptor that matches the model information.

Information contained in the capability descriptor provides the basis for identifying the exact nature of scanning supported by a scan peripheral with which the capability descriptor is associated. The preferred example in FIGs. 2a and 2b provides a standard set of capability options, though others are possible. The capabilities of the scan peripheral obviously affect the type of scan which can be selected, so the driver operation in FIG. 2a first examines the capabilities to alter a user interface provided on a client machine which initiated the request for a scan job.

In the preferred embodiment of FIG. 2a, a capability descriptor is examined for whether its associated scan peripheral supports color scanning 34, for the associated scan peripheral's maximum scan size 36, for whether the

 associated peripheral supports a flatbed scan 38, and for whether the associated peripheral supports the JPEG image format 39. For purposes of illustrating the invention, typical dynamic options are shown. Other choices, such as PDF and TIFF formats, are assumed to be always available in the driver. The list of options to be enabled may be altered as a matter of design choice, as will be recognized by artisans. For each dynamic option in FIG. 2a, a positive indication results in the option being enabled. Thus, in FIG. 2a, options may be enabled for a color scan 40, for a legal size scan 42, for a photo size scan 44, and for a JPEG format 46.

Each enabled option is submitted 47 to the client. This allows activation of appropriate options within a scan interface in the client machine. Once a user selects parameters for a scan from among the enabled options and any other standard parameters, scan driver initialization commences 48 as shown in FIG. 2b. Returned parameters allow the driver 18 to configure itself based upon those selected parameters and the scan peripheral's capabilities. As in FIG. 2a, only typical dynamic options based on the capability descriptor are illustrated, i.e., a typical set of options that might vary from one model of scan peripheral to another. There are many more possible parameter choices that do not depend on the descriptor, i.e., parameter choices commonly shared by most, if not all, scan peripherals. The latter type of parameter choice is not illustrated in FIG. 2b in order to keep the illustration simple.

In FIG. 2b, the driver 18 checks the control language 50 and then configures itself according to the control language, for example, as a first language configuration 52 or as a second language configuration 54. Scanning control languages may be manufacturer specific languages or industry shared languages. Support for ADF (automatic document feed) is checked 58 and a corresponding ADF scan 62 configuration is made. An image format parameter is checked 64 and the appropriate image format is configured, for example, as a TIFF format 64, a JPEG format 68 or a PDF format 70. Using the configured driver modules, the scan is then executed 72.

The modules allowing the driver 18 to configure itself are separate driver modules which become linked for a scan job according to selected parameters and capabilities. Driver modules must be organized to permit such linking. A preferred organization for driver modules is shown in FIG. 3. As in FIGs. 2a and 2b, only an exemplary set of dynamic modules are accounted for in FIG. 3, while others are likely to be used in practice. Driver modules on the same row are alternates. This permits linking through only one module from each row since the modules in each row are mutually exclusive choices. The organization in FIG. 3 is logical, of course, and any suitable software/firmware architecture may be employed to realize the logical organization and linking operation of the driver modules.

Referring to FIG. 3, which is based upon the available options in FIG. 2b, first language and second language modules 74, 76 form alternate options, and the image format modules, TIFF module 80, JPEG module 82 and PDF module 84 form alternate options. Scan data is routed through the enabled modules for the duration of a scan job executed by step 72 in FIG. 2b. The next job might request a different format and might be routed to a peripheral having different capabilities, so the data will likely be routed through different modules.

A scan interface module 86 interfaces the driver 18 to the rest of the system. The definition of the remaining system will vary according to where the driver is resident. In the case of the driver being in a network connected peripheral server, such as a JetDirect[®], it includes a network code to transfer data to a destination client PC. In the case of a directly connected device, it is the interface to the software that requested the scan job. That software might display the image to the user, might insert it into a word processor document, might attach it to an e-mail message, might automatically archive it in permanent storage, etc. A device interface module 88 communicates with a scan peripheral 12. In the case where the driver is resident in a server, such as a JetDirect[®], the device interface

88 may interface to multiple scan peripherals, or a scan peripheral and other types of peripherals, or any combination of common and different type peripherals.

Artisans will appreciate the flexibility provided by the invention. A driver of the invention dynamically handles scan peripherals having different capabilities without the need for update of the driver, a feature which is especially useful in a peripheral server.

While various embodiments of the present invention have been shown and described, it should be understood that other modifications, substitutions and alternatives are apparent to one of ordinary skill in the art. Such modifications, substitutions and alternatives can be made without departing from the spirit and scope of the invention, which should be determined from the appended claims.

Various features of the invention are set forth in the appended claims.

1 2

for:

1	1. A program for interfacing a client computer to one or more
2	scan peripheral devices, the program comprising functions for:
3	querying a scan peripheral for a capability descriptor;
4	determining whether an appropriate capability descriptor is obtained
5	in response to said step of querying;
6	storing a capability descriptor associated with a scan peripheral for
7	which an appropriate information capability descriptor has been received as
8	determined in said step of determining;
9	configuring a scan driver for a scan job for a scan peripheral when a
10	scan job is requested by a client by linking a set of pre-stored driving modules, a
11	set of pre-stored driving modules being selected according to user set parameters
12	in the scan job and capabilities indicated in a stored information capability
13	descriptor concerning a scan peripheral to which the scan job is directed.
1	2. The program according to claim 1, further comprising a step of
2	de-linking pre-stored driving modules upon completion of a scan job.
1	3. The program according to claim 1, wherein said step of
2	configuring includes extracting information from a stored capability descriptor to
3	alter a user interface dependent upon a peripheral's capabilities.
1	4. The program according to claim 1, wherein a capability
2	descriptor stored in said step of storing comprises a string including fields
3	indicating dots per inch capabilities, paper size capabilities, color/grayscale
4	options, image formats supported, and whether or not a preview scan is supported.
1	5. The program according to claim 1, stored in a server which
2	provides an interface to a network and at least one scan peripheral.
1	6. The program according to claim 1, stored in a computer

7. The program according to claim 1, further comprising a functions

connected to at least one scan peripheral.

3	obtaining a model of scan peripheral for a peripheral when said
4	function for determining determines that an appropriate capability descriptor was
5	not received in response to a query conducted by said function for querying; and
6	associating a pre-stored capability descriptor with a scan peripheral
7	whose model was determined by said step of obtaining.
1	8. A scan peripheral server having a network connection interface
2	and one or more ports for connection to at least one scan peripheral, the server
3	including:
4	memory for storing capability descriptors defining capabilities of
5	scan peripherals;
6	memory for storing a set of driver modules; and
7	a program for controlling execution of scan jobs requested from the
8	network connection of a scan peripheral connected to one of said one or more
9	ports, the program comprising functions for
10	obtaining a capability descriptor from one or more scan
11	peripherals connected to any of said one or more ports;
12	storing a received capability descriptor in said memory for
13	storing capability descriptors;
14	accepting a scan job request from said network connection for
15	one or more scan peripherals attached to said one or more ports;
16	extracting capability information from a stored capability
17	descriptor in response to a scan job;
18	sending information to said network connection to modify a
19	user interface;
20	accepting parameters for a scan job from said network
21	connection;
22	linking driver modules from said set of driver modules
23	according to capability information extracted by said function for extracting and
24	parameters accepted by said function for accepting; and

1

2

25	controlling a scan job according to the driver modules linked
26	in said function for linking.
1	9. The server according to claim 8, wherein a capability
2	descriptor comprises a data string of capability data.
1	10. The server according to claim 8, wherein said program for
2	controlling execution of scan jobs further comprises:
3	obtaining model information from any one or more scan peripherals
4	connected to any of said one or more ports when said any one or more scan
5	peripherals does not provide a capability descriptor; and
6	associating a capability descriptor pre-stored in said memory for
7	storing capability descriptors with said any one or more scan peripherals which
8	does not provide a capability descriptor according to model information obtained
9	in said step of obtaining.
1	11. The server according to claim 8, wherein a data string is
2	formatted as a data string including a scan language, an image format, a resolution
3	and a preview scan capability.
1	12. A peripheral including a scanning capability, the peripheral
2	comprising:
3	a scan system for scanning documents and producing electronic data
4	therefrom;
5	an interface for connecting to a client machine or server;
6	memory for storing data;
7	a scan capability descriptor stored in said memory; and
8	a controller for communicating with said client machine or server
9	through said interface to perform a scan job, said controller sending said capability
10	descriptor to said client machine or server through said interface in response to a

13. A method for controlling a scan job directed to a peripheral including a scanning function, the method comprising steps of:

query requesting a capability descriptor.

3	obtaining a capability descriptor from the peripheral including the
1	scanning function; then, to implement a scan job,
5	configuring a scan driver from a set of scan drive modules based
6	upon capabilities indicated by said capability descriptor and parameters included
7	in the scan job.

2

3

4

5

6

7

8

9

10

11 12

13

14

15

16

17

18

19

20

21


22

23

ABSTRACT


A driver of the invention adapts to scan peripherals using information in capability descriptor provided by scan peripherals or a capability descriptor selected based upon scan peripheral model information. A driver of the invention automatically determines a scan peripheral's capabilities using information from the capability descriptor, and uses the information to configure itself from a set of driver modules. A user interface and scan job are then run through options enabled by the appropriate set of driver modules as determined by the capability descriptor. A preferred embodiment server of the invention embodies such an adaptive driver that queries a scan peripheral when it is first connected to the server. If an appropriate capability descriptor is obtained in response to the query, the capability descriptor is stored for use during a scan job. When a scan job using that peripheral is requested, user interface code extracts information from the capability descriptor to allow the user interface to dynamically change dependent upon the peripheral's capabilities as indicated by the information from the capability descriptor. Capabilities indicated by a capability descriptor might include, for example, dots per inch choices, paper sizes, color/grayscale options, image formats, and whether or not a preview scan is supported. The appropriate capabilities become selectable through a user interface at a client computer. When a scan job is directed, scan driver software/firmware uses selected parameters passed by the client and the information from the stored capability descriptor to determine an appropriate command protocol and image encoding. A set of driver modules is then dynamically linked to create an appropriate driver for the scan job.

Sheet 1 of 4

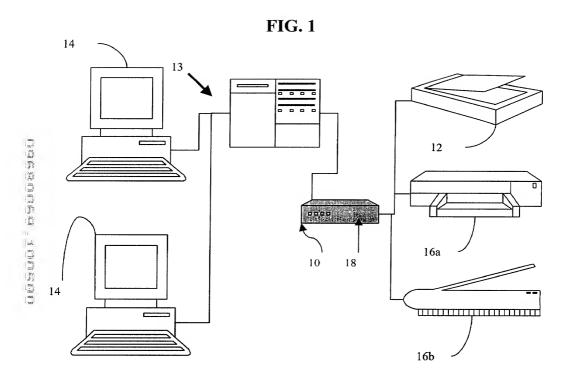

HP PDNO: 10006131-1


Sheet 3 of 4

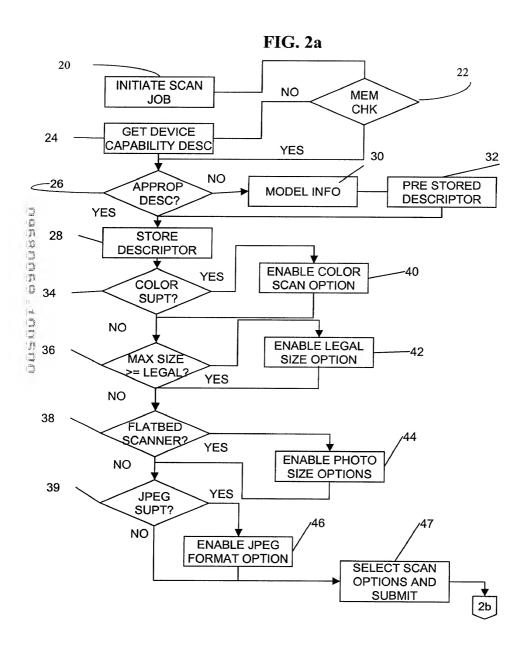

HP PDNO: 10006131-1

Sheet 2 of 4


FIG. 2b

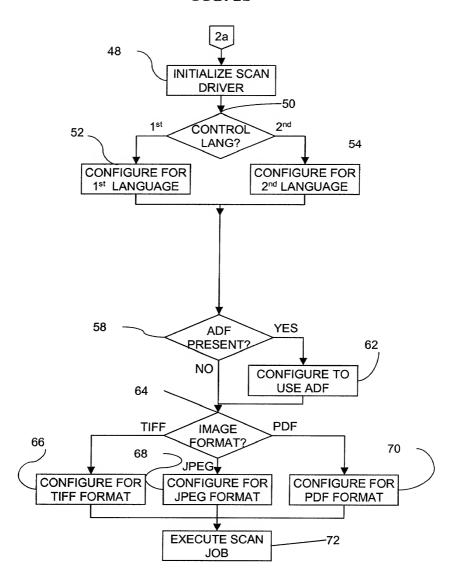

HP PDNO: 10006131-1

Sheet 4 of 4

FIG. 3

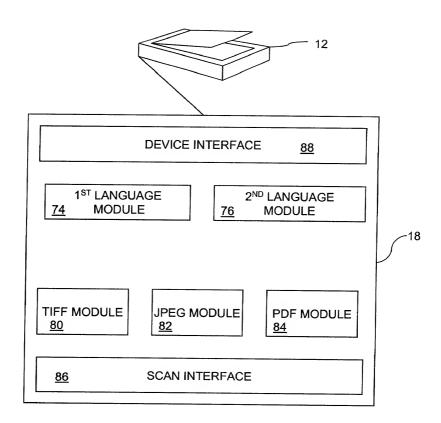

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

ATTORNEY DOCKET NO. 10006131-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification o	f which is a	ttached hereto unless t	he following box is cl	necked:		
() was filed o Number	() was filed on as US Application Serial No. or PCT International Application lumber and was amended on (if applicable).					
including the claim	ns, as amer		nt(s) referred to above	e above-identified specification, ve. I acknowledge the duty to FR 1.56.		
Foreign Application(s) a	nd for Claim of	Foreign Priority				
inventor(s) certificate lis	sted below and	s under Title 35, United State that also identified below a nonwhich priority is claims	any foreign application for	any foreign application(s) for patent or patent or patent or inventor(s) certificate having a		
COUNTRY		APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119		
				YES: NO:		
	100.1.			YES: NO:		
Provisional Application I hereby claim the benebelow:	efit under Title	35, United States Code Se	ection 119(e) of any Unite	d States provisional application(s) listed		
	AF	PLICATION SERIAL NUMBER	FILING DATE			
U. S. Priority Claim						
information as defined i	in Title 37, Coo onal or PCT int	on of Title 35, United States de of Federal Regulations, Si emational filing date of this a FILING DATE	ection 1.56(a) which occur application:	now ledge the duty to disclose material red between the filling date of the prior		
ATTENATION SECURE	HOWIDER	TEMO DATE	STATUS	patented/pending/abandoned)		
			-			
POWER OF ATTORNEY: As a named inventor, business in the Patent a	l hereby appo	oint the following attorney(s Office connected therewith:	and/or agent(s) to pros	ecute this application and transact all		
Custo	mer Number	022879	Place Customer Number Bar Code Label here			
Send Correspondend HEW LETT-PA CKA RI			Direct Telephone	Calls To:		
Intellectual Property Administration			David M. Mason			
P.O. Box 272400 Fort Collins, Colorado 80527-2400			(408) 447-0854			
made on information the knowledge that or both, under Sec	on and belie t willful fals tion 1001 c	t are believed to be tru e statements and the I	e; and further that th ike so made are puni d States Code and th	are true and that all statements ese statements were made with shable by fine or imprisonment, at such willful false statements		
Full Name of Inventor:	Daniel R. Po	earson	Citizenship:			
Residence:						
Post Office Address:	<u>n/a</u>		····			
Inventor's Signature	11		Date			

DECLARATION AND	POWER OF ATTO	RNEY
FOR PATENT APPLIC	ATION (continue	d)

ATTORNEY DOCKET NO. 10006131-1

Full Name of # 2 joint inventor:	David A. Kumpf		Citizenship:
Residence:			
Post Office Address:			, 44 - 4.1
Inventor's Signature			
inventor's Signature		Date	
F. II Nove of # 2 to take a same	Olever O. Countille		000 - 11
Full Name of # 3 joint inventor:	Glenn G. Carcido		Citizenship:
Residence:			
Post Office Address:			
Inventor's Signature	· · · · · · · · · · · · · · · · · · ·	Date	
Full Name of # 4 joint inventor:			Citizenship:
Residence:			
Post Office Address:			
Inventor's Signature			
iliventor's Signature		Date	
			Citizenship:
Residence:			
Post Office Address:			
Inventor's Signature		Date	
Full Name of # 6 joint inventor:			Citizenship:
Residence:			
Post Office Address:			
inventor's Signature	***************************************		
inventor's Signature		Date	
Full Name of # 7 laint inventor			Olifornation
Residence:	:		Citizenship:
Post Office Address:			
Inventor's Signature		Date	The state of the s
Full Name of #8 joint inventor:			Citizenship:
Residence:			
Post Office Address:			
inventor's Signature	-	Date	
		Date	